FREDDOX RECOVERY UNIT FD-520D





The Freddox FD-520D represents an intelligent unit featuring a brushless motor, a digital pressure gauge, and a digital integration module.

The unit excels in facilitating rapid and dependable recovery and filling operations for refrigerant circuits, due to its robust 1HP brushless motor, which employs sparkless technology to ensure compatibility with a wide range of refrigerants, including flammable R32 and R1234yf.

The FD-520D is designed for convenience, featuring a compact double cylinder design that provides swift recovery, lightweight portability, and exceptional field performance. It is equipped with a high-definition LCD screen displaying a digital gauge, all controllable with a single button for seamless operation.

Features

- Safe Sparkless design suitable with light flammable refrigerant HFO/HFC blends as R32 or R1234yf
- Compact and light weight design easy to carry
- Digital gauge with refrigerants preregistered
- HD LCD Display with back light for night use
- Oilless compressor
- Self-cleaning mode to avoid mixing different refrigerants with auto cut
- Powerful motor 1HP (750W)
 - High pressure protection



TECHNICAL DATA

Freddox Recovery Unit


RECOVERY UNIT FD-520D			
BRIC Code	4401-FD520D		
Cylinder Quantity	2 Cylinder		
Power Supply	220V - 240V, 50/60Hz		
Motor	750W (1HP)		
Speed of Revolution	2500 RPM		
Electric Current	220V:6A		
Compressor	No oil lubricate, forced air cooling, piston type		
High Pressure Protection	38.5 bar / 3850 kPa (558 psi)		
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F		
Dimensions	375 x 250 x 320 mm		
Net Weight	10 kg		





Refrigerant Gas	R134a	R407C	R32
Liquid	2.40 kg/min	2.70 kg/min	3.50 kg/min
Push-pull Mode	7.50 kg/min	8.50 kg/min	9.50 kg/min



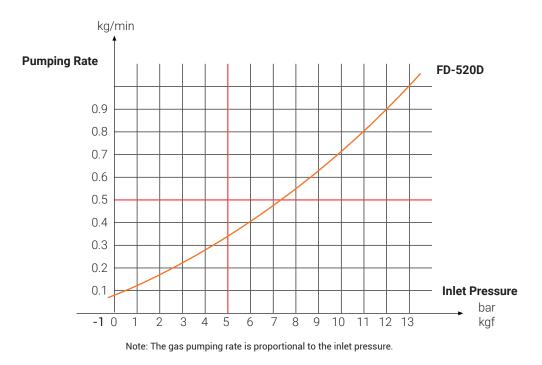

Manufacturer reserves the right to change any product specifications without notice.: BeijerRefAB_RecoveryUnit_Freddox_23_EN



